

# REVÊTOU

Revêtements Sols et Murs. Agencements

## PARQUET STRATIFIÉ

*COLLECTION 2023 - 2024*



V1.23.04.10

**E EGGER**

# Les sols EGGER offrent les avantages suivants :

- › Longévité grâce à une résistance durable à la décoloration, même en cas d'exposition intensive à la lumière du soleil.
- › Stabilité accrue grâce au système de pose breveté.
- › Propriétés anti-glissement contrôlées et certifiées.
- › Qualité contrôlée : les sols EGGER dépassent les normes légales. Chaque lame est contrôlée avant la livraison.
- › Réduction optimale des bruits grâce à des sous-couches isolantes adaptées au type de sol.
- › Garantie étendue grâce au système de construction.
- › Particulièrement durable, car entièrement recyclable.
- › Naturel, à base de bois et totalement exempt de PVC.

## Structure des revêtements de sol stratifiés EGGER

### Composition des sols stratifiés EGGER

- 1** Surface robuste, très résistante à l'abrasion
- 2** Papier décor
- 3** Panneau support HDF swell barrier en bois
- 4** Contrebalancement




# Trouvez le décor adapté.

Notre visualiseur de sol vous aidera à voir comment un décor révèle votre pièce. Il vous suffit de charger une photo, de choisir le décor et de **transformer votre pièce** :



[egger.com/myfloor](https://egger.com/myfloor)

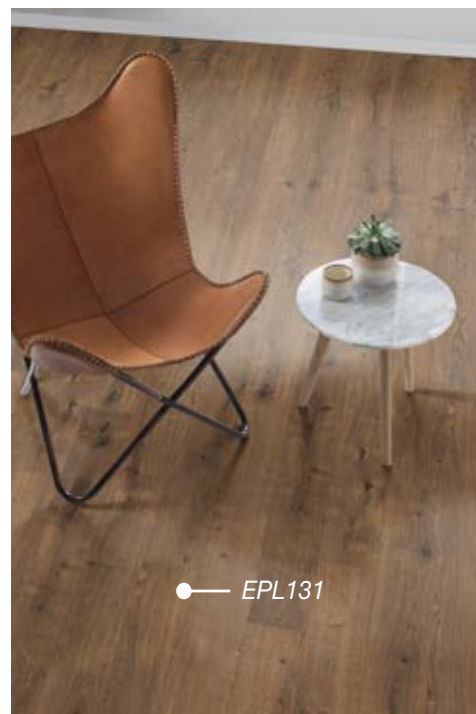

Poser un revêtement de sol est  
**une opération simple et rapide.**



**Pose flottante avec le système  
d'installation CLIC it!**

## Pose facile

Facilité de mise en oeuvre : le système de pose CLIC it! permet de poser nos sols de manière sûre, rapide et facile dans n'importe quelle pièce.

Les propriétés hermétiques et l'ajustement optimal offrent une protection supplémentaire contre l'humidité.

**Plus d'informations :**  
[egger.com/clicit](https://egger.com/clicit)

# Revêtement de sol EGGER Stratifié un sol au plus près du naturel

## EGGER 7 mm



7mm - AC3 Page 07

**EPL039**

Chêne Falun



7mm - AC3 Page 08

**EPL020**

Chêne Belfort Argent



7mm - AC3 Page 09

**EPL037**

Chêne Trilogy Cappuccino



7mm - AC3 Page 10

**EPL208**

Chêne du Nord naturel

## EGGER PRO 8 mm



8mm - AC3 Page 11

**EPL036**

Chêne Bardolino Gris



8mm - AC3 Page 12

**EPL035**

Chêne Bardolino



8mm - AC3 Page 13

**EPL092**

Chêne Zermatt beige sable



8mm - AC3 Page 14

**EPL089**


Chêne Grove



8mm - AC3 Page 15

**EPL182**


Chêne sauvage naturel



8mm - AC3 Page 16

**EPL174**

Bois d'Agira marron



8mm - AC3 Page 17

**EPL137**

Chêne Elton Blanc



8mm - AC3 Page 18

**EPL109**

Noyer Mansonia



8mm - AC4 -4C Page 19

**EPL046**

Chêne Newbury clair



8mm - AC4 -4C Page 20

**EPL065**

Noyer Langley clair



8mm - AC4 -4C Page 21

**EPL081**

Chêne du Nord brun



8mm - AC4 -4C Page 22

**EPL050**

Chêne de Corton noir



8mm - AC4 -4C Page 23

**EPL075**

Chêne Dunnington foncé



8mm - AC4 -4C Page 24

**EPL074**

Chêne Dunnington clair



8mm - AC4 -4C Page 25

**EPL100**

Chêne du Nord cognac



8mm - AC4 -4C Page 26

**EPL096**

Chêne Grayson naturel



8mm - AC4 -4C Page 27

**EPL179**

Chêne Soria naturel



8mm - AC4 -4C Page 28

**EPL154**

Chêne Asgil clair



8mm - AC4 -4C Page 29

**EPL175**

Noyer Bedollo foncé



8mm - AC4 -4C Page 30

**EPL178**

Chêne Soria gris clair



8mm - AC4 -4C Page 31

**EPL189**

Chêne Melba beige



8mm - AC4 -4C Page 32

**EPL147**

Chêne Olchon foncé



8mm - AC4 -4C Page 33

**EPL205**

Chêne Sherman gris clair



8mm - AC4 -4C Page 34

**EPL177**

Chêne Soria blanc



8mm - AC4 -4C Page 35

**EPL180**


Chêne Soria gris



**EPL191**  
Chêne Melba Marron



**EPL204**  
Chêne Sherman marron clair




**EPL038**  
Chêne calcaire




**EPL190**  
Chêne Melba naturel




**EPL102**  
Chêne d'Amiens clair




**EPL095**  
Chêne de Brooklyn blanc



**EPL078**  
Chêne Brynford brun




**EPL140**  
Chêne Narva




**EPL198**  
Chêne Predaia naturel




**EPL156**  
Chêne Asgil miel




**EPL095**  
Chêne Shannon miel



**EPL011**  
Chêne Rillington clair



**EPL012**  
Chêne Rillington foncé




**EPL013**  
Chêne Ripon foncé


## EGGER PRO 10 mm



**EPL131**  
Chêne Punata




**EPL159**  
Chêne Vallée naturel



**EPL142**  
Chêne d'Olchon beige rosé


## EGGER PRO 12 mm




**EPL149**  
Chêne Cesena Nature



**EPL150**  
Chêne Cesena gris



**EPL144**  
Chêne d'Olchon miel



**EPL146**  
Chêne d'Olchon fumé



**EBL039**  
*Chêne Falun*  
7mm - AC3



EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm



**EBL020**  
*Chêne Belfort Argent*  
7mm - AC3





**EPL037**

*Chêne Trilogy Cappuccino*

7mm - AC3



EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm



**EPL208**

*Chêne du Nord naturel*

7mm - AC3



**EPL036**

*Chêne Bardolino Gris*

8mm - AC3



EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm



**EPL035**  
*Chêne Bardolino*  
8mm - AC3



## EPL092

*Chêne de Zermatt beige rosé*

8mm - AC3



EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm



**EPL089**  
*Chêne Grove*  
8mm - AC3



**EPL182**

*Chêne sauvage naturel*  
8mm - AC3

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



**EPL174**

*Bois d'Agira marron*  
8mm - AC3

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm







**EPL137**  
*Chêne Elton Blanc*  
8mm - AC3

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



**EPL109**  
*Noyer Mansonia*  
8mm - AC3

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





**EPL046**

*Chêne Newbury clair*

8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



**EPL065**  
*Noyer Langley clair*  
8mm - AC4 - 4C

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





**EPL081**  
*Chêne du Nord brun*  
8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



EGGERPRO-8 mm

**EPL050**  
*Chêne de Corton noir*  
8mm - AC4 - 4C

EGGERPRO -10 mm

EGGERPRO -12 mm





**EPL075**

*Chêne Dunnington foncé*

8mm - AC4 - 4C

EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm



**EPL074**

*Chêne Dunnington clair*

8mm - AC4 - 4C







**EPL100**

*Chêne du Nord cognac*

8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm



**EPL096**  
*Chêne Grayson naturel*  
8mm - AC4 - 4C





**EPL179**

*Chêne Soria naturel*

8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm



**EPL154**  
*Chêne Asgil clair*  
8mm - AC4 - 4C





**EPL175**

*Noyer Bedollo foncé*

8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO - 10 mm

EGGERPRO - 12 mm

EGGER -7mm



**EPL178**  
*Chêne Soria gris clair*  
8mm - AC4 - 4C

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





**EPL189**  
*Chêne Melba beige*  
8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



**EPL147**

*Chêne Olchon foncé*

8mm - AC4 - 4C

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm







**EPL205**

*Chêne Sherman gris clair*

8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



**EPL177**  
*Chêne Soria blanc*  
8mm - AC4 - 4C

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





**EPL180**  
*Chêne Soria gris*  
8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



**EPL191**

*Chêne Melba Marron*

8mm - AC4 - 4C

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





**EPL204**

*Chêne Sherman marron clair*  
8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



**EPL038**  
*Chêne calcaire*  
8mm - AC4

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





**EPL190**  
*Chêne Melba naturel*  
8mm - AC4

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



**EPL102**  
*Chêne d'Amiens clair*  
8mm - AC4

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm







**EPL095**

*Chêne de Brooklyn blanc*  
8mm - AC4

EGGER - 7mm

EGGERPRO - 8 mm

EGGERPRO - 10 mm

EGGERPRO - 12 mm

EGGER -7mm



EGGERPRO-8 mm

**EPL078**  
*Chêne Brynford brun*  
8mm - AC4

EGGERPRO -10 mm

EGGERPRO -12 mm





**EPL140**  
*Chêne Narva*  
8mm - AC4

EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm



**EPL198**

*Chêne Predaia naturel*

8mm - AC4





**EPL156**  
*Chêne Asgil miel*  
8mm - AC4

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



**EPL105**

*Chêne Shannon miel*  
8mm - AC4

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





**EPL011**  
*Chêne Rillington clair*  
8mm - Kingsize - AC4

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO - 10 mm

EGGERPRO - 12 mm

EGGER -7mm



EGGERPRO-8 mm

**EPL012**

*Chêne Rillington foncé*  
8mm - Kingsize - AC4

EGGERPRO -10 mm

EGGERPRO -12 mm







**EPL013**  
*Chêne Ripon foncé*  
8mm - Kingsize - AC4

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



**EPL131**  
*Chêne Punata*  
10mm - AC4

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





**EPL159**  
*Chêne Vallée naturel*  
10mm - AC4

EGGER - 7mm

EGGERPRO - 8 mm

EGGERPRO - 10 mm

EGGERPRO - 12 mm

EGGER -7mm



**EPL142**

*Chêne d'Olchon beige rosé*  
10mm - AC5

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





**EPL149**  
*Chêne Cesena Nature*  
12mm - AC5

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm




**EPL150**  
*Chêne Cesena gris*  
12mm - AC5

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

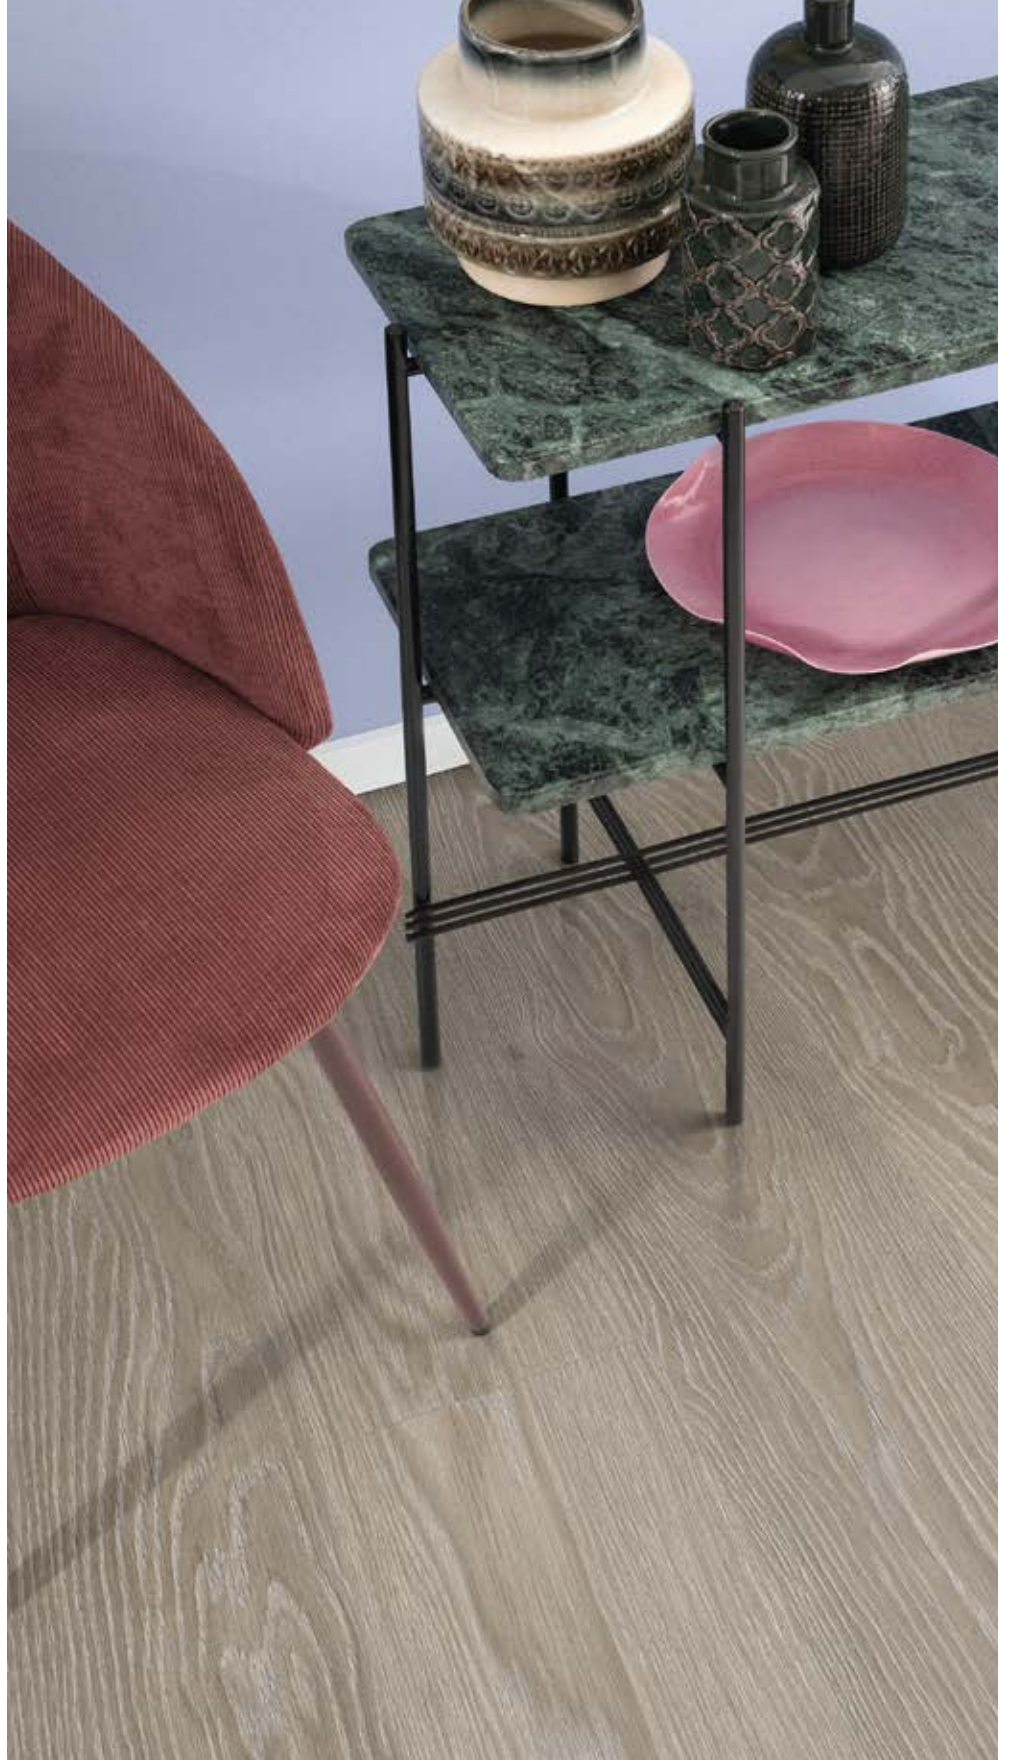



**EPL144**  
*Chêne d'Olchon miel*  
12mm - AC5

EGGER - 7mm

EGGERPRO - 8 mm

EGGERPRO - 10 mm

EGGERPRO - 12 mm

EGGER -7mm



**EPL146**  
*Chêne d'Olchon fumé*  
12mm - AC5

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





TECHNICAL DATASHEET		
EGGER PRO LAMINATE FLOORING		7/ 31 Classic
Coreboard	E1	HDF swell stopp plus
Profile	JUST clic!	The patented EGGER installation system JUST clic! stands for quick and simple installation process without glue. Patented as JUST clic! EP 1 441 087 and EP 1 462 587
Guarantee domestic area	15	according to Egger Guarantee
Guarantee comercial area	5	according to Egger Guarantee
Antistatic properties according EN1815	7	yes, < 2 kV
Class of use	31	
European Norm EN13329	EN 13329-31	
Format	CLASSIC	
Dimension mm (length x width)	1292 x 192	
Complete thickness	7	
Thickness of silenizio® special cellulose Bevel	-	
Packaging		
Pallet	One-way-pallet	
Paket information		
	Piece	10
	m2	2,48
	kg	15,63
Pallet information		
	Piece	520
	m2	128,99
	kg	826,00
Classification and general requirements according EN13329		
Abrasion resistance according EN13329, annex E	AC3 (IP ≥ 2000)	
Impact resistance according EN13329, annex H	Große Kugel: ≥ 500 mm Kleine Kugel: ≥ 8 N	
Resistance to staining EN438	Group 1 + 2: level 5 group 3: level 4	
Effect of furniture leg according EN424	No damage shall be visible, when tested with foot Type 0 artefact	
Effect of a castor chair according EN425 (Type W)	No change in appearance or damage	
Thickness swelling according ISO 24336	≤ 18 %	
Tolerance of top layer according EN13329	length ± 0,5 mm width ± 0,1 mm thickness ± 0,5 mm	
Light fastness according EN13329	grey scale ≥ level 4 (EN:20105-A02)	
Static indentation by constant pressure according EN ISO 24343-1	< 0,05	
Surface soundness according EN13329, annex D	≥ 1,0 N/mm2	
Thermal resistance according to EN 12667	0,06 m² K/W	



TECHNICAL DATASHEET		
EGGER PRO LAMINATE FLOORING		8/ 31 Classic
Coreboard	E1 HCHO	HDF swell stopp plus
Profile	JUST clic! Patented	The patented EGGER installation system JUST clic! stands for quick and simple installation process without glue. Patented as JUST clic! EP 1 441 087 and EP 1 462 587
Guarantee domestic area	15 Y	according to Egger Guarantee
Guarantee comercial area	5 Y	according to Egger Guarantee
Antistatic properties according EN1815	Antistatic	yes, < 2 kV
Class of use	31	
European Norm EN13329	EN 13329-31	
Format	CLASSIC	
Dimension mm (length x width)	1292 x 192	
Complete thickness	8	
Thickness of silenizio® special cellulose	-	
Bevel	-	
<b>Packaging</b>		
Pallet	One-way-pallet	
<b>Paket information</b>		
	Piece	8
	m <sup>2</sup>	1,98
	kg	14,46
<b>Pallet information</b>		
	Piece	480
	m <sup>2</sup>	119,07
	kg	877,00
<b>Classification and general requirements according EN13329</b>		
Abrasion resistance according EN13329, annex E	AC3 (IP ≥ 2000)	
Impact resistance according EN13329, annex H	Big ball: ≥ 500 mm Small ball: ≥ 8 N	
Resistance to staining EN438	Group 1 + 2: level 5 group 3: level 4	
Effect of furniture leg according EN424	No damage shall be visible, when tested with foot Type 0 artefact	
Effect of a castor chair according EN425 (Type W)	No change in appearance or damage	
Thickness swelling according ISO 24336	≤ 18 %	
Tolerance of top layer according EN13329	length ± 0,5 mm width ± 0,1 mm	
Light fastness according EN13329	grey scale ≥ level 4 (EN:20105-A02)	
Static indentation by constant pressure according EN ISO 24343-1	< 0,05	
Surface soundness according EN13329, annex D	≥ 1,0 N/mm <sup>2</sup>	
Thermal resistance according to EN 12667	0,07 m <sup>2</sup> K/W	



TECHNICAL DATASHEET		
EGGER PRO LAMINATE FLOORING		8/32 Classic WV4 UF
Coreboard		HDF swell stopp plus
Profile		The patented UNI fit! installation system stands for a quick and simple installation process without glue. Produced under the licence of Flooring Industries™.
Guarantee domestic area		according to Egger Guarantee
Guarantee comercial area		according to Egger Guarantee
Antistatic properties according EN1815		yes, < 2 kV
Class of use	32	
European Norm EN13329		
Format	CLASSIC	
Dimension mm (length x width)	1291 x 193	
Complete thickness	8	
Thickness of silenzio® special cellulose		
Bevel	WV4	
Packaging	Packaging	
Pallet	One-way-pallet	
Paket information		
	Piece	8
	m2	1,99
	kg	14,46
Pallet information		
	Piece	480
	m2	119,40
	kg	877,00
Classification and general requirements according EN13329		
Abrasion resistance according EN13329, annex E	AC4 (IP ≥ 4000)	
Impact resistance according EN13329, annex H	Big ball: ≥ 750 mm Small ball: ≥ 12 N	
Resistance to staining EN438	Group 1 + 2: level 5 group 3: level 4	
Effect of furniture leg according EN424	No damage shall be visible, when tested with foot Type 0 artefact	
Effect of a castor chair according EN425 (Type W)	No change in appearance or damage	
Thickness swelling according ISO 24336	≤ 18 %	
Tolerance of top layer according EN13329	length ± 0,5 mm width ± 0,1 mm thickness ± 0,5 mm	
Light fastness according EN13329	grey scale ≥ level 4 (EN:20105-A02)	
Static indentation by constant pressure according EN ISO 24343-1	< 0,05	
Surface soundness according EN13329, annex D	≥ 1,25 N/mm2	
Thermal resistance according to EN 12667	0,07 m² K/W	



TECHNICAL DATASHEET		
EGGER PRO LAMINATE FLOORING		8/32 Kingsize
Coreboard		HDF swell stopp plus
Profile		The patented UNI fit! installation system stands for a quick and simple installation process without glue. Produced under the licence of Flooring Industries™.
Guarantee domestic area		according to Egger Guarantee
Guarantee comercial area		according to Egger Guarantee
Antistatic properties according EN1815		yes, < 2 kV
Class of use	32	
European Norm EN13329		
Format	KINGSIZE	
Dimension mm (length x width)	1291 x 327	
Complete thickness	8	
Thickness of silenizio® special cellulose		
Bevel	WV2	-
Pallet	Packaging One-way-pallet	
Paket information		
	Piece	6
	m2	2,53
	kg	18,31
Pallet information		
	Piece	240
	m2	101,20
	kg	755,00
Classification and general requirements according EN13329		
Abrasion resistance according EN13329, annex E	AC4 (IP ≥ 4000)	
Impact resistance according EN13329, annex H	Big ball: ≥ 750 mm Small ball: ≥ 12 N	
Resistance to staining EN438	Group 1 + 2: level 5 group 3: level 4	
Effect of furniture leg according EN424	No damage shall be visible, when tested with foot Type 0 artefact	
Effect of a castor chair according EN425 (Type W)	No change in appearance or damage	
Thickness swelling according ISO 24336	≤ 18 %	
Tolerance of top layer according EN13329	length ± 0,5 mm width ± 0,1 mm thickness ± 0,5 mm	
Light fastness according EN13329	grey scale ≥ level 4 (EN:20105-A02)	
Static indentation by constant pressure according EN ISO 24343-1	< 0,05	
Surface soundness according EN13329, annex D	≥ 1,25 N/mm2	
Thermal resistance according to EN 12667	0,07 m² K/W	



TECHNICAL DATASHEET		
EGGER PRO LAMINATE FLOORING		8/32 Classic
Coreboard		HDF swell stopp plus
Profile		The patented EGGER installation system JUST clic! stands for quick and simple installation process without glue. Patented as JUST clic! EP 1 441 087 and EP 1 462 587
Guarantee domestic area		according to Egger Guarantee
Guarantee commercial area		according to Egger Guarantee
Antistatic properties according EN1815		yes, < 2 kV
Class of use	32	
European Norm EN13329		
Format	CLASSIC	
Dimension mm (length x width)	1292 x 192	
Complete thickness	8	
Thickness of silenzio® special cellulose Bevel	-	
Pallet	Packaging One-way-pallet	
Paket information		
	Piece	8
	m <sup>2</sup>	1,98
	kg	14,46
Pallet information		
	Piece	480
	m <sup>2</sup>	119,07
	kg	877,00
Classification and general requirements according EN13329		
Abrasion resistance according EN13329, annex E	AC4 (IP ≥ 4000)	
Impact resistance according EN13329, annex H	Big ball: ≥ 750 mm Small ball: ≥ 12 N	
Resistance to staining EN438	Group 1 + 2: level 5 group 3: level 4	
Effect of furniture leg according EN424	No damage shall be visible, when tested with foot Type 0 artefact	
Effect of a castor chair according EN425 (Type W)	No change in appearance or damage	
Thickness swelling according ISO 24336	≤ 18 %	
Tolerance of top layer according EN13329	length ± 0,5 mm width ± 0,1 mm thickness ± 0,5 mm	
Light fastness according EN13329	grey scale ≥ level 4 (EN:20105-A02)	
Static indentation by constant pressure according EN ISO 24343-1	< 0,05	
Surface soundness according EN13329, annex D	≥ 1,25 N/mm <sup>2</sup>	
Thermal resistance according to EN 12667	0,07 m <sup>2</sup> K/W	



TECHNICAL DATASHEET		
EGGER PRO LAMINATE FLOORING		10/32 WV4
Coreboard	E1 HCHO	HDF swell stopp plus
Profile		The patented UNI fit! installation system stands for a quick and simple installation process without glue. Produced under the licence of Flooring Industries™.
Guarantee domestic area		according to Egger Guarantee
Guarantee comercial area		according to Egger Guarantee
Antistatic properties according EN1815		yes, < 2 kV
Class of use		32
European Norm EN13329		EN 13329-32
Format		CLASSIC
Dimension mm (length x width)		1291 x 193
Complete thickness		10
Thickness of silenzio® special cellulose Bevel		WV4
Pallet		Packaging One-way-pallet
<b>Paket information</b>		
	Piece	7
	m2	1,74
	kg	15,99
<b>Pallet information</b>		
	Piece	364
	m2	90,70
	kg	853,00
Classification and general requirements according EN13329		
Abrasion resistance according EN13329, annex E		AC4 (IP ≥ 4000)
Impact resistance according EN13329, annex H		Big ball: ≥ 750 mm Small ball: ≥ 12 N
Resistance to staining EN438		Group 1 + 2: level 5 group 3: level 4
Effect of furniture leg according EN424		No damage shall be visible, when tested with foot Type 0 artefact
Effect of a castor chair according EN425 (Type W)		No change in appearance or damage
Thickness swelling according ISO 24336		≤ 18 %
Tolerance of top layer according EN13329		length ± 0,5 mm width ± 0,1 mm thickness ± 0,5 mm
Light fastness according EN13329		grey scale ≥ level 4 (EN:20105-A02)
Static indentation by constant pressure according EN ISO 24343-1		< 0,05
Surface soundness according EN13329, annex D		≥ 1,25 N/mm2
Thermal resistance according to EN 12667		0,08 m² K/W



TECHNICAL DATASHEET		
EGGER PRO LAMINATE FLOORING		12/33 Classic
Coreboard	E1 HCHO	HDF swell stopp plus
Profile	UNI FIT	The patented UNI fit! installation system stands for a quick and simple installation process without glue. Produced under the licence of Flooring Industries™.
Guarantee domestic area	25 years	according to Egger Guarantee
Guarantee comercial area	5 years	according to Egger Guarantee
Antistatic properties according EN1815	Antistatic	yes, < 2 kV
Class of use	33	
European Norm EN13329	EN 13329-33	
Format	CLASSIC	
Dimension mm (length x width)	1291 x 193	
Complete thickness	12	
Thickness of silenzio® special cellulose		
Bevel	WV4	
Pallet	Packaging	
Pallet	One-way-pallet	
Paket information		
	Piece	6
	m <sup>2</sup>	1,49
	kg	16,31
Pallet information		
	Piece	312
	m <sup>2</sup>	77,74
	kg	860,00
Classification and general requirements according EN13329		
Abrasion resistance according EN13329, annex E	AC5 (IP ≥ 6000)	
Impact resistance according EN13329, annex H	Big ball: ≥ 1000 mm Small ball: ≥ 15 N	
Resistance to staining EN438	Group 1 + 2: level 5 group 3: level 5	
Effect of furniture leg according EN424	No damage shall be visible, when tested with foot Type 0 artefact	
Effect of a castor chair according EN425 (Type W)	No change in appearance or damage	
Thickness swelling according ISO 24336	≤ 15 %	
Tolerance of top layer according EN13329	length ± 0,5 mm width ± 0,1 mm thickness ± 0,5 mm	
Light fastness according EN13329	grey scale ≥ level 4 (EN:20105-A02)	
Static indentation by constant pressure according EN ISO 24343-1	< 0,05	
Surface soundness according EN13329, annex D	≥ 1,25 N/mm <sup>2</sup>	
Thermal resistance according to EN 12667	0,09 m <sup>2</sup> K/W	



# REVÊTOU



 [www.revetou.com](http://www.revetou.com)

 [revetou\\_mar](https://www.instagram.com/revetou_mar)

 [Revetou](https://www.facebook.com/Revetou)

## **Siège social CASABLANCA**

**Tél.:** +212 5 22 94 36 34

**Fax:** +212 5 22 94 36 15

**E-mail:** [contact@revetou.com](mailto:contact@revetou.com)

**Adresse:** 51 rue Attabari,  
20100, Maarif - Maroc

## **Succursale MARRAKECH**

**Tél.:** +212 5 24 33 62 01

**Fax:** +212 5 24 33 52 80

**E-mail:** [marrakech@revetou.com](mailto:marrakech@revetou.com)

**Adresse:** 264, Zone Industrielle  
Sidi Ghanem, Maroc

## **Succursale RABAT**

**Tél.:** +212 5 37 79 69 16

**Fax :** +212 5 37 79 69 58

**E-mail :** [rabat@revetou.com](mailto:rabat@revetou.com)

**Adresse:** 34 Av. Fadila Yac  
Al Mansour 10052 - Maroc

## **Succursale TANGER**

**Tél.:** +212 5 39 39 55 96

**Fax:** +212 5 39 39 55 98

**E-mail:** [tanger@revetou.com](mailto:tanger@revetou.com)

**Adresse:** Lot 264, Zone Industrielle  
de Gueznaya - Maroc